


STANDARD MEASURES FOR CONTAINER LOADING

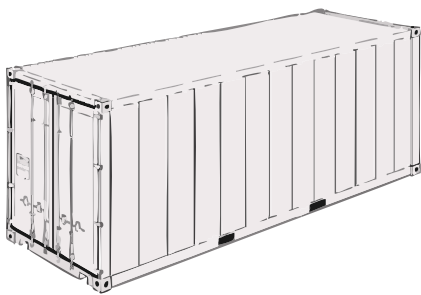


UPGRADED 20'

INSIDE LENGTH	INSIDE WIDTH	INSIDE HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
19' 4"	7' 7"	7' 10"	7' 6"	7' 6"	1,150 Cft	5,060 Lbs	61,996 Lbs
5.900 m	2.311 m	2.390 m	2.286 m	2.280 m	32.63 Cu.m	2,300 Kgs	28,180 Kgs

HIGH CUBE 40'

39' 5"	7' 8"	8' 10"	7' 8"	8' 5"	2,694 Cft	8,750 Lbs	58,450 Lbs
12.036 m	2.350 m	2.697 m	2.338 m	2.585 m	76.3 Cu.m	3,970 Kgs	26,510 Kgs

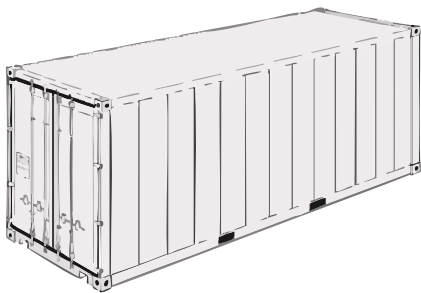


OPEN TOP 20' (upgraded also available)

INSIDE LENGTH	INSIDE WIDTH	INSIDE HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
19' 4"	7' 7"	7' 8"	7' 6"	7' 2"	1,136 Cft	5,280 Lbs	47,620 Lbs
5.894 m	2.311 m	2.354 m	2.286 m	2.184 m	32.23 Cu.m	2,400 Kgs	21,600 Kgs

OPEN TOP 40'

39' 5"	7' 8"	7' 8"	7' 8"	7' 5"	2,350 Cft	8,490 Lbs	58,710 Lbs
12.028 m	2.350 m	2.345 m	2.341 m	2.274 m	65.5 Cu.m	3,850 Kgs	26,630 Kgs

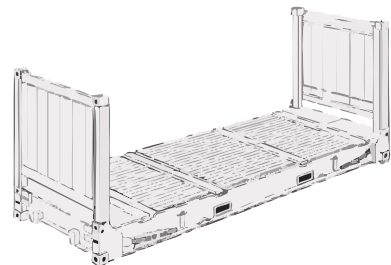


FLAT RACK COLLAPSIBLE 20'

INSIDE LENGTH	INSIDE WIDTH	INSIDE HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
18' 6"	7' 3"	7' 4"	-	-	-	6,601 Lbs	61,117 Lbs
5.618 m	2.208 m	2.233 m	-	-	-	2,750 Kgs	27,730 Kgs

OPEN TOP 40'

39' 7"	6' 10"	6' 5"	-	-	-	12,787 Lbs	85,800 Lbs
12.080 m	2.126 m	2.043 m	-	-	-	5,800 Kgs	39,000 Kgs

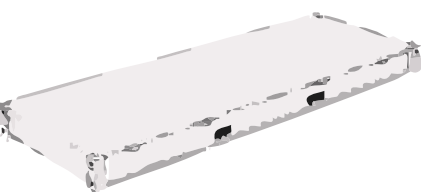


CHASSIS 33' TRI-AXLE

LENGTH	TARE WEIGHT	MAXI CARGO
Overall extended 41' 3"	10.900 Lbs	44.500 Lbs*
Lunghezza massima 12.6 m	4.950 Lbs	20.185 Lbs**

CHASSIS 40' GOOSENECK

LENGTH	TARE WEIGHT	MAXI CARGO
Overall extended 41' 3"	6.500 Lbs	44.500 Lbs*
Lunghezza massima 12.6 m	2.950 Lbs	20.185 Lbs**

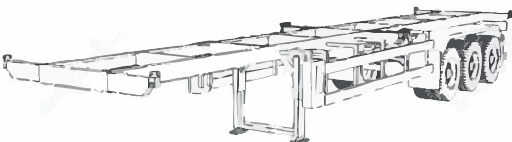

IMPORTANT NOTE:
The average specifications below are given as an indication only. Great variations can be found between series and makes. Should a client have specific requirements his tucker will be responsible to ensure that container he is picking up fits this requirement.

STANDARD 20'

INSIDE LENGTH	INSIDE WIDTH	INSIDE HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
19' 4"	7' 8"	7' 10"	7' 8"	7' 6"	1,172Cft	4,916Lbs	47,900Lbs
5.900 m	2.350 m	2.393 m	2.342 m	2.280 m	33.2 Cu.m	2,230 Kgs	21,770 Kgs

STANDARD 40'

39' 5"	7' 8"	7' 10"	7' 8"	7' 6"	2,390Cft	8,160Lbs	50,040Lbs
12.036 m	2.350 m	2.392 m	2.340 m	2.280 m	67.7 Cu.m	3,700 Kgs	26,780 Kgs



REEFER 20'


INSIDE LENGTH	INSIDE WIDTH	INSIDE HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
17' 8"	7' 5"	7' 5"	7' 5"	7' 3"	1,000 Cft	7,040 Lbs	45,760 Lbs
5.425 m	2.275 m	2.260 m	2.258 m	2.216 m	28.3 Cu.m	3,200 Kgs	20,800 Kgs

REEFER 40'

37' 8"	7' 5"	7' 2"	7' 5"	7' 10"	2,040 Cft	10,780 Lbs	56,276 Lbs
11.493 m	2.270 m	2.197 m	2.282 m	2.155 m	57.8 Cu.m	4,900 Kgs	25,580 Kgs

REEFER 40' HIGH CUBE

37' 11"	7' 6"	8' 2"	7' 6"	8' 0"	2,344 Cft	9,900 Lbs	57,561 Lbs
11.557 m	2.294 m	2.500 m	2.294 m	2.440 m	66.6 Cu.m	4,500 Kgs	25,980 Kgs

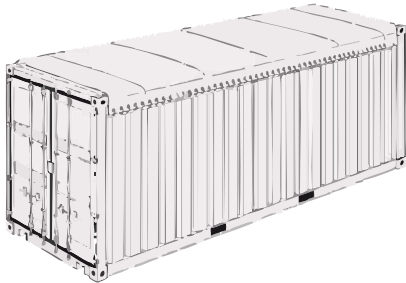


FLAT RACK 20'

INSIDE LENGTH	INSIDE WIDTH	INSIDE HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
18' 5"	7' 3"	7' 4"	-	-	-	5,578Lbs	47,333Lbs
5.620m	2.200m	2.233m	-	-	-	2,530Kg	21,470kg

FLAT RACK 40'

39' 7"	6' 10"	7' 2"	-	-	-	12,081Lbs	85,800Lbs
12.080m	2.438m	2.197m	-	-	-	5,480Kg	39,000kg

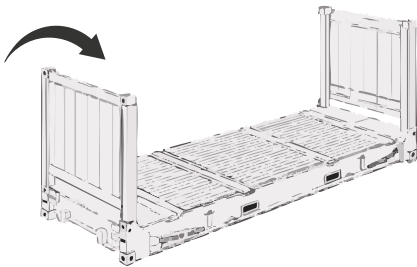

PLATFORM 20'

INSIDE LENGTH	INSIDE WIDTH	PLAYLOAD HEIGHT	DOOR WIDTH	DOOR HEIGHT	CAPACITY	TARE WEIGHT	MAXI CARGO
19' 11"	8' 0"	7' 4"	-	-	-	6,061 Lbs	52,896 Lbs
6.058 m	2.438 m	2.233 m	-	-	-	2,530 Kgs	24,000 Kgs

PLATFORM 40'

40' 0"	8' 0"	6' 5"	-	-	-	12,783 Lbs	86,397 Lbs
12.18 m	2.40 m	1.95 m	-	-	-	5,800 Kgs	39,200 Kgs

CHASSIS 23,5'

LENGTH	TARE WEIGHT	MAXI CARGO
Overall unextended 23' 6"	6,600 Lbs	35.500 Lbs
Overall extended 27' 2"		39.500 Lbs
Lunghezza massima 7.20 m	2,995 Lbs	16.100 Lbs
Lunghezza massima 8.30 m		17.920 Lbs

* As per USA Road Limitation
** Coma da limitazioni Autostradali USA